


AGFEO Systemheadset 9120

Systemheadset an AGFEO TK-Anlagen anmelden

Das Systemheadset 9120 wird vom DECT Modul und der DECT-S0 Basis ab Firmwareversion 2.2 in Verbindung mit den AGFEO TK-Anlagen AS 181, 1x, 2x, 3x und AS 40P ab Version 6.2f, der AS 40 P mit P400-1 und der AS 100IT mit P400-IT ab Version 6.5h, der AS 281 All-In-One, AS 35, AS 35 All-In-One, AS 43, AS 45 und der AS 200IT unterstützt.

Systemheadset gezielt anmelden

ST 25



Funktion einleiten.



Wählen Sie den Menüpunkt „Headset“ aus und bestätigen Sie mit „enter“.



Wählen Sie den Menüpunkt „Gezielt anmelden“ aus und bestätigen Sie mit „enter“.



Wenn Sie mehrere DECT Stationen in ihrer Anlage betreiben, wählen Sie die Station aus, an der das Headset angemeldet werden soll und bestätigen Sie mit „enter“.




Wählen Sie die Position in der DECT Station aus, auf der Sie Ihr Headset anmelden wollen und bestätigen Sie mit „enter“.

Die DECT Station wird nun in den Anmeldemodus geschaltet, gehen Sie beim Anmelden des Headsets vor, wie in der Anleitung des Headsets beschrieben.

Systemheadset gezielt anmelden

ST 21, ST 30, ST 40



Funktion einleiten.



Wählen Sie den Menüpunkt „Headset“ aus und bestätigen Sie mit „OK“.



Wählen Sie den Menüpunkt „Gezielt anmelden“ aus und bestätigen Sie mit „OK“.



Wenn Sie mehrere DECT Stationen in ihrer Anlage betreiben, wählen Sie die Station aus, an der das Headset angemeldet werden soll und bestätigen Sie mit „OK“.




Wählen Sie die Position in der DECT Station aus, auf der Sie Ihr Headset anmelden wollen und bestätigen Sie mit „OK“.

Die DECT Station wird nun in den Anmeldemodus geschaltet, gehen Sie beim Anmelden des Headsets vor, wie in der Anleitung des Headsets beschrieben.

AGFEO Systemheadset 9120

Systemheadset ungezielt anmelden

ST 25



Funktion einleiten.



Wählen Sie den Menüpunkt „Headset“ aus und bestätigen Sie mit „enter“.



Wählen Sie den Menüpunkt „anmelden“ aus und bestätigen Sie mit „enter“.



Wenn Sie mehrere DECT Stationen in ihrer Anlage betreiben, wählen Sie die Station aus, an der das Headset angemeldet werden soll und bestätigen Sie mit „enter“.


Die DECT Station wird nun in den Anmeldemodus geschaltet, gehen Sie beim Anmelden des Headsets vor, wie in der Anleitung des Headsets beschrieben.

Firmware Version 7.0 oder höher:

Nachdem das Headset angemeldet ist, können Sie es mit „Enter“ direkt ihrem Telefon zuordnen.

Systemheadset ungezielt anmelden

ST 21, ST 30, ST 40



Funktion einleiten.



Wählen Sie den Menüpunkt „Headset“ aus und bestätigen Sie mit „OK“.



Wählen Sie den Menüpunkt „anmelden“ aus und bestätigen Sie mit „OK“.



Wenn Sie mehrere DECT Stationen in ihrer Anlage betreiben, wählen Sie die Station aus, an der das Headset angemeldet werden soll und bestätigen Sie mit „OK“.

Die DECT Station wird nun in den Anmeldemodus geschaltet, gehen Sie beim Anmelden des Headsets vor, wie in der Anleitung des Headsets beschrieben.


Firmware Version 7.0 oder höher:

Nachdem das Headset angemeldet ist, können Sie es mit „OK“ direkt ihrem Telefon zuordnen.


AGFEO Systemheadset 9120

Systemheadset in TK-Suite einrichten (Anlagen Firmware bis 6.9)


Nachdem Sie das Systemheadset an Ihrer TK-Anlage angemeldet haben, lesen Sie die TK-Anlage mit TK-Suite aus. Im Bereich „Systemtelefone, DECT, analoge Geräte“ ist ein neues DECT Mobilteil mit dem Gerätetyp „DECT-Headset“ eingetragen. Vergeben Sie eine Rufnummer für das Headset.

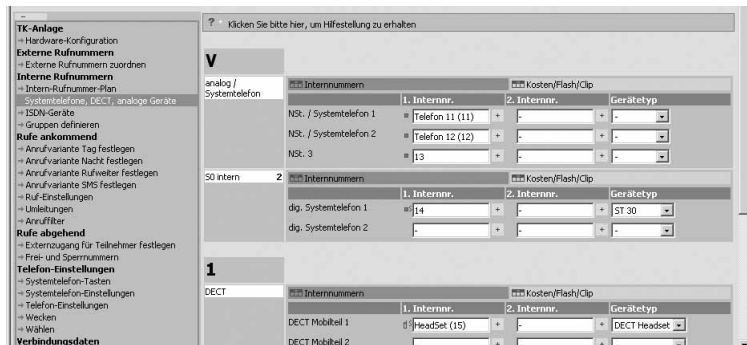

Tragen Sie nun das Headset in die gleichen Anrufvarianten ein wie Ihr Telefon, so daß Ihr Headset immer mitklingelt und Sie die Rufe direkt am Headset annehmen können.

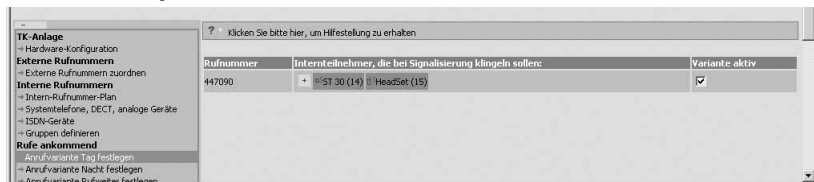

Wenn Sie nun noch für Ihr Headset Fremdwahl und CTI Wahl aktivieren, können Sie bequem vom Systemtelefon aus für Ihr Headset wählen.

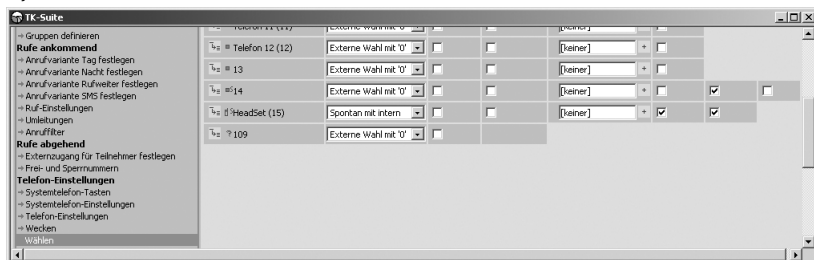

AGFEO Systemheadset 9120

Systemheadset in TK-Suite einrichten (Anlagen Firmware ab 7.0)

Nachdem Sie das Systemheadset an Ihrer TK-Anlage angemeldet haben, lesen Sie die TK-Anlage mit TK-Suite aus. Im Bereich „Interne Rufnummern/Geräte: DECT“ ist ein neues DECT Mobilteil mit dem Gerätetyp „DECT-Headset“ eingetragen.

Im Bereich „Interne Rufnummern/Geräte: digitale Systemtelefone“ können Sie dieses DECT Headset einem Systemtelefon zuweisen.

The screenshot shows the 'Set online - admin' interface for AGFEO. The main window title is 'Administrator-Menü / Geräte: digitale Systemtelefone'. The left sidebar contains a navigation menu with categories: TK-Anlage, EIB-Hausbus, Externe Rufnummern, and Interne Rufnummern. Under 'Interne Rufnummern', 'Geräte: digitale Systemtelefone' is selected. The main area displays a table of digital system telephones. The table has columns for 'Internnr.', 'Gerätetyp', and 'DECT Headset'. There are three rows of data, each representing a different telephone set (3, 4, and 5). The first row (set 3) shows two digital system telephones with internal numbers 30 (15) and 16, both assigned to 'ST 30 + AB (aktiv)'. The second row (set 4) shows two digital system telephones with internal numbers 40 (17) and 18, both assigned to 'ST 40 (aktiv)'. The third row (set 5) shows one digital system telephone with internal number 18, assigned to 'ST 40 (aktiv)'. The 'DECT Headset' column shows 'HEADSET (25)' for the first row and '-' for the others.

Set	Internnr.	Gerätetyp	DECT Headset
3	dig. Systemtelefon 1	ST 30 (15)	ST 30 + AB (aktiv)
	dig. Systemtelefon 2	16	-
4	dig. Systemtelefon 1	ST 40 (17)	ST 40 (aktiv)
	dig. Systemtelefon 2	18	-
5	dig. Systemtelefon 1	18	HEADSET (25)

Anschließend wird das zugewiesene Headset vom Telefon wie ein Telefonhörer behandelt.


AGFEO Systemheadset 9120

Registration of a Systemheadset to the Telephone System

The System Headset 9120 will be supported by the DECT Module and DECT S0 Base from firmware 2.2 of the AGFEO Telephone Systems AS 181, 1x, 2x, 3 x and AS 40P from version 6.2f, the AS 40P with processor P400-1, AS 100 IT with processor P400-IT from version 6.5 h, including the AS 281 All In One, AS 35, AS 35 All In One, AS 43, AS 45 and AS 200 IT.

Specific Registration of Systemheadset 9120

ST 25



Start Programming.



Please select "Headset" from the Menu and confirm by pressing "Enter".



Please select "Specific Registr." and confirm by pressing "Enter"



Should you operate more than one DECT station within your system, then please select the station to which the headset should be assigned to and confirm by pressing "Enter".




Select the position within the DECT station to which the headset should be registered and confirm by pressing "Enter".

The DECT station is now in registration mode, to register the headset, please proceed as described in the headset manual.

Specific Registration of Systemheadset 9120

ST 21, ST 30, ST 40



Start Programming.



Please select "Headset" from the Menu and confirm by pressing "OK".



Please select "Specific Registr." and confirm by pressing "OK"



Should you operate more than one DECT station within your system, then please select the station to which the headset should be assigned to and confirm by pressing "OK".




Select the position within the DECT station to which the headset should be registered and confirm by pressing "OK".

The DECT station is now in registration mode, to register the headset, please proceed as described in the headset manual.

AGFEO Systemheadset 9120

Registration of a Systemheadset 9120

ST 25



Start Programming.



Please select "Headset" from the Menu and confirm by pressing "Enter".



Select from the menu "Register" and confirm by pressing "Enter".



Should you operate more than one DECT station within your system, then please select the station to which the headset should be assigned to and confirm by pressing "Enter".


The DECT station is now in registration mode, to register the headset, please proceed as described in the headset manual.

Firmware 7.0 or higher:

After the headset has been registered you will be able to allocate this directly to your telephone by pressing „enter“.

Registration of a Systemheadset 9120

ST 21, ST 30, ST 40



Start Programming.



Please select "Headset" from the Menu and confirm by pressing "OK".



Select from the menu "Register" and confirm by pressing "OK".



Should you operate more than one DECT station within your system, then please select the station to which the headset should be assigned to and confirm by pressing "OK".

The DECT station is now in registration mode, to register the headset, please proceed as described in the headset manual.

Firmware 7.0 or higher:

After the headset has been registered you will be able to allocate this directly to your telephone by pressing „OK“.

AGFEO Systemheadset 9120

System Headset set-up via TK-Suite (System Firmware up to 6.9)

After registering the Headset to the PABX System, read out the system configuration via TK Suite Set. In the section "Extensions / Devices:DECT" you will find the new extension (headset) registered.

DECT

DECT 50 Basis	1st Extn. No	2nd Extn. No	Phone type
50 bus 1 Internal	Headset (60)		DECT Headset
50 bus 2 Internal			
DECT mobile unit 1			
DECT mobile unit 2			
DECT mobile unit 3			

Ensure that incoming calls are set the same as for your telephone. This will ensure that your headset will ring at the same time as your phone and that calls can be answered directly from your headset.

Number	Extensions to Call	Distribution active
9954545	+ ST 30 (24) Headset (60)	<input checked="" type="checkbox"/>


If you also activate remote dial and CTI for your headset, then you will be able to dial for your headset by using a system phone.

Extension	External Seizure	Use LER	Automatic dial	Remote dial enabled (extension)	Enabled for CTI	Remote Dial On-Hook	Single button dialling
Default No. (0)	With '0'	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>		
11	With '0'	<input type="checkbox"/>	<input type="checkbox"/>	[None]	<input checked="" type="checkbox"/>		
12	With '0'	<input type="checkbox"/>	<input type="checkbox"/>	[None]	<input checked="" type="checkbox"/>		
13	With '0'	<input type="checkbox"/>	<input type="checkbox"/>	[None]	<input checked="" type="checkbox"/>		
14	With '0'	<input type="checkbox"/>	<input type="checkbox"/>	[None]	<input checked="" type="checkbox"/>		
15	With '0'	<input type="checkbox"/>	<input type="checkbox"/>	[None]	<input checked="" type="checkbox"/>		
16	With '0'	<input type="checkbox"/>	<input type="checkbox"/>	[None]	<input checked="" type="checkbox"/>		
17	With '0'	<input type="checkbox"/>	<input type="checkbox"/>	[None]	<input checked="" type="checkbox"/>		
ST 30 (24)	as Direct Line & Extn.	<input type="checkbox"/>	<input type="checkbox"/>	[None]	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Headset (60)	as Direct Line & Extn.	<input type="checkbox"/>	<input type="checkbox"/>	ST 30 (24)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
798	With '0'	<input type="checkbox"/>	<input type="checkbox"/>				

AGFEO Systemheadset 9120

System Headset set-up via TK-Suite (System Firmware 7.0 and higher)

After you have registered your headset to the telephone system, please use TK-Suite to receive the system configuration. In the section "Extensions" "Devices: DECT" a new DECT Mobile with the type "DECT Headset" can be found. In the section "Extensions" "Devices: Digital System Phones" you may allocate this DECT headset to a System Phone.

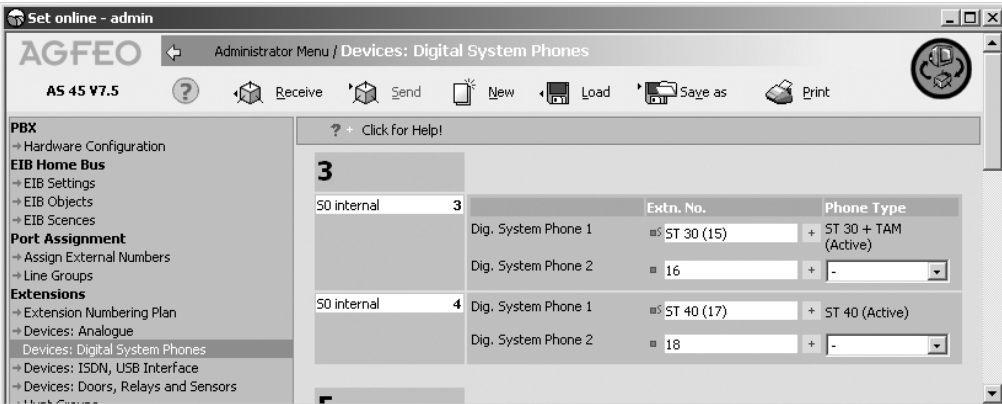

The screenshot shows the TK-Suite Administrator Menu for "AGFEO" with the path "Administrator Menu / Devices: Digital System Phones". The interface includes a top toolbar with icons for "Receive", "Send", "New", "Load", "Save as", and "Print". A left sidebar contains a navigation tree with categories like "PBX", "EIB Home Bus", "Port Assignment", and "Extensions". The main area displays a table for "Digital System Phones" with columns for "Extn. No." and "Phone Type".

Extn. No.	Phone Type
50 internal 3	Dig. System Phone 1: ST 30 (15) + ST 30 + TAM (Active)
	Dig. System Phone 2: 16 + -
50 internal 4	Dig. System Phone 1: ST 40 (17) + ST 40 (Active)
	Dig. System Phone 2: 18 + -

The allocated headset will now be treated from the telephone like a handset.

Identnr. 1100614
Änderung und Irrtum
vorbehalten.
Printed in Germany
0068

AGFEO Hotline
(Germany only): 0900- 1024336 (6s/1Einheit)

GN Netcom Hotline: +49 8031 26 51 14
+49 8031 26 51 22

AGFEO GmbH & Co. KG
Gaswerkstr. 8
D-33647 Bielefeld
Internet: <http://www.agfeo.de>